
Rugged • Accurate • Easy to use


AUTOMATIC BRAKE TESTERS...

The Inspection Lane Standard!



Easily installed surface or flush tread plates minimize the positioning problems experienced with roller systems.

- World's most widely accepted and used brake tester
- Braking imbalance shown at a glance.
- Instantaneous testing
- Tests large or small vehicles
- No complicated electronics or hydraulics
- Rugged, trouble-free construction, performance-proven in thousands of inspection lanes



Simple, fast reading...liquid level in tubes show braking ability of each wheel with a fifth tube for total braking effort...detect low, unequal or unsafe braking conditions at a glance.



TOLL-FREE: 888-274-8490 TELEPHONE: 815-458-6216

FAX: 815-458-9350 E-MAIL: CASTLE@AMERITECH.NET WEBSITE: WWW.CASTLEEQUIPMENT.COM P.O. Box 3; BRAIDWOOD, IL 60408



SPECIFICATIONS

DIMENSIONS

DRIVE-OVER CAPACITY IN LBS.			BRAKE TESTING CAP. EFFORT IN LBS.		A -c-1_	TREAD PLATE						
PER	VEHICLE	END					147: -115	Landh	Center to Center	Total	Total	
Model	Туре		Per Wheel Plate*	Total		Model	Width "A"	Length "B"	Spacing "C"	Width "D"	Length "E"	
WY-400	Surrace	32,000	1,500-6,000	6,000-24,000		WY-400	3'0"	12'6"	5′10″	12'11"	28′5″	
WY-75 WY-75-36	Flush Flush	36,000 36,000		6,000-24,000 6,000-24,000		WY-75 WY-75-36	3′0″ 3′0″	12′6″† 15′6″	5′10″ 5′10″	12′7″ 12′11″	28′8″ 34′8″	

*Other Braking Effort Capacities in pounds per Vehicle Wheel

†Longer wheelbase vehicles may require extended tread plates.


ADDITIONAL WEAVER EQUIPMENT

PVMI Approved

- Flush mounted for fast, automatic operation
- Wide tread plates for full tire pattern contact with any over-the-highway vehicle
- Drive on from either direction

• Eye level scale makes reading easy, fast and accurate

Width, overall	12′5″			
Length, overall	4′3-5/8″			
Ht. of pedestal	4′10″			
Tread plate length	4'0"			
Tread plate width	3′0″			
Tread plate C. to C.	5′10″			

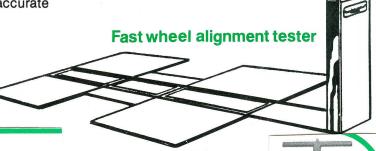

Weaver Jack Oil

with rust inhibitor, for all hydraulic jacks.

There's a **WEAVER**® jack for any job LO-HI-DRAULIC Service Jacks...

A full range of sizes and capacities to handle any service job, from tire-changing on compact cars to track removal on the heaviest tractor.

- Low silhouette for easy positioning
- Unique quick-lift lever for fast approach of saddle to load on 2, 4, 10 and 20 ton models
- Counterbalanced handle

Model WA-72B (2-ton)

- Three position handle lock for easy maneuvering
- Capacities from 2 to 20 tons

